

2006

# Towards Real-time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach

Kasthurirangan Gopalakrishnan  
*Iowa State University*, [rangan@iastate.edu](mailto:rangan@iastate.edu)

Halil Ceylan  
*Iowa State University*, [hceylan@iastate.edu](mailto:hceylan@iastate.edu)

Follow this and additional works at: [http://lib.dr.iastate.edu/ccee\\_conf](http://lib.dr.iastate.edu/ccee_conf)

 Part of the [Construction Engineering and Management Commons](#)

---

## Recommended Citation

Gopalakrishnan, Kasthurirangan and Ceylan, Halil, "Towards Real-time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach" (2006). *Civil, Construction and Environmental Engineering Conference Presentations and Proceedings*. 27.

[http://lib.dr.iastate.edu/ccee\\_conf/27](http://lib.dr.iastate.edu/ccee_conf/27)

This Conference Proceeding is brought to you for free and open access by the Civil, Construction and Environmental Engineering at Iowa State University Digital Repository. It has been accepted for inclusion in Civil, Construction and Environmental Engineering Conference Presentations and Proceedings by an authorized administrator of Iowa State University Digital Repository. For more information, please contact [digirep@iastate.edu](mailto:digirep@iastate.edu).

---

# Towards Real-time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach

## **Abstract**

The primary objective of this study was to assess the pavement structural deterioration based on Non-Destructive Test (NDT) data using an Artificial Neural Networks (ANN) based approach. ANN-based prediction models were developed for rapid determination of flexible airfield pavement layer stiffnesses from actual NDT deflection data collected in the field in real time. For training the ANN models, ILLI-PAVE, an advanced finite-element pavement structural model which can account for non-linearity in the unbound pavement granular layers and subgrade layers, was employed. Using the ANN-predicted moduli based on the NDT test results, the relative severity effects of simulated Boeing 777 (B777) and Boeing 747 (B747) aircraft gear trafficking on the structural deterioration of National Airport Pavement Test Facility (NAPTF) flexible pavement test sections were characterized.

## **Keywords**

Non-destructive test, artificial neural networks, ILLI-PAVE, national airport pavement test facility

## **Disciplines**

Construction Engineering and Management

## **Comments**

This is a manuscript of an article from *ANNIE 2006, ANN in Engineering Conference*, St. Louis, Missouri, November 5-8, 2006

# **Towards Real-time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach**

KASTHURIRANGAN GOPALAKRISHNAN  
Postdoctoral Res. Assoc., Iowa State University, Ames, IA  
HALIL CEYLAN  
Asst. Prof., Iowa State University, Ames, IA

## **ABSTRACT**

The primary objective of this study was to assess the pavement structural deterioration based on Non-Destructive Test (NDT) data using an Artificial Neural Networks (ANN) based approach. ANN-based prediction models were developed for rapid determination of flexible airfield pavement layer stiffnesses from actual NDT deflection data collected in the field in real time. For training the ANN models, ILLI-PAVE, an advanced finite-element pavement structural model which can account for non-linearity in the unbound pavement granular layers and subgrade layers, was employed. Using the ANN-predicted moduli based on the NDT test results, the relative severity effects of simulated Boeing 777 (B777) and Boeing 747 (B747) aircraft gear trafficking on the structural deterioration of National Airport Pavement Test Facility (NAPTF) flexible pavement test sections were characterized.

## **INTRODUCTION**

The National Airport Pavement Test Facility (NAPTF) is located at the Federal Aviation Administration's (FAA) William J. Hughes Technical Center near Atlantic City International Airport, New Jersey, USA. It was constructed to support the development of advanced mechanistic-based airport pavement design procedures especially for New Generation Aircraft (NGA) such as Boeing 777, based on full-scale traffic test data.

The first series of test pavements, referred to as Construction Cycle 1 (CC-1), consisted of nine instrumented test pavements (six flexible and three rigid) that were 18.3 m (60 ft) wide and total 274.3 m (900 ft) in length. The nine test pavements were built on three different subgrade materials: low-strength (target California Bearing Ratio [CBR] of 4), medium-strength (target CBR of 8), and high-strength (target CBR of 20).

During the first series of traffic tests at NAPTF, a simulated six-wheel Boeing 777 (B777) landing gear in one lane and a four-wheel Boeing 747 (B747) landing gear in the other lane were trafficked simultaneously until the test pavements were deemed failed. Non-Destructive Tests (NDT) using both Falling Weight Deflectometer (FWD) and Heavy Weight Deflectometer (HWD)

**Reference** to this paper should be made as follows: Gopalakrishnan, K., and Ceylan, H. 2 (2006) "Towards Real-Time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach," ANNIE 2006, ANN in Engineering Conference, St. Louis, Missouri, November 5-8, 2006.

were conducted to document the uniformity of pavement and subgrade construction as well as to monitor the effect of full-scale trafficking on pavement response and performance over time.

Based on the results from the sensitivity studies at the NAPTF and Denver International Airport (DIA), the amplitude of the impulse load does not seem to be critical provided the generated deflections are within the limits of all deflection sensors (McQueen et al., 2001; Lee et al., 1997). In this study, an ANN-based methodology was developed to backcalculate the Asphalt Concrete (AC) and subgrade moduli from the 40-kN (9,000-lb) NDT test data acquired at NAPTF during full-scale dynamic, simulated traffic testing.

### **ANN BASED STIFFNESS PREDICTION MODELS**

The Elastic Layered Programs (ELPs) used in the analysis and design of flexible pavements consider the pavement as an elastic multi-layered media, and assume that pavement materials are linear-elastic, homogeneous and isotropic. However, the unbound granular materials and fine-grained subgrade soils, referred to as pavement geomaterials, do not follow a linear stress-strain behavior under repeated traffic loading. The non-linearity or stress-dependency of resilient modulus for unbound granular materials and cohesive fine-grained subgrade soils has been well established (Garg *et al.* 1998). Unbound aggregates exhibit stress hardening type behavior whereas fine-grained subgrade soils show stress-softening type behavior. Also, previous research studies have shown the non-linearity of underlying pavement layers at the NAPTF (Gomez-Ramirez and Thompson 2002; Garg and Marsey 2002).

Over the years, ANNs have emerged as successful computational tools for studying a majority of pavement engineering problems (Meier and Rix 1995; Ceylan et al. 2005). Recent research studies at the Iowa State University and University of Illinois have focused on the development of ANN based forward and backcalculation type highway flexible pavement analysis models to predict critical pavement responses and layer moduli, respectively (Ceylan et al. 2005). Gopalakrishnan *et al.* (2006) and Gopalakrishnan and Thompson (2004) successfully demonstrated the ANN-based approach for backcalculating airport flexible pavement layer moduli from HWD test data, specifically targeted towards the study of NAPTF flexible pavement sections.

In the current study, ANN models that were originally developed and validated for predicting the pavement layer moduli from the 40-kN (9,000-lb) FWD deflection basins of highway flexible pavements, were used in backcalculating flexible pavement layer moduli from 40-kN (9,000-lb) FWD data acquired during full-scale traffic testing at the NAPTF.

### **GENERATION OF SYNTHETIC DATABASE**

Developed at the University of Illinois (Raad and Figueroa 1980), ILLI-PAVE is an axisymmetric finite element (FE) program commonly used in the structural

**Reference** to this paper should be made as follows: Gopalakrishnan, K., and Ceylan, H. 3 (2006) "Towards Real-Time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach," ANNIE 2006, ANN in Engineering Conference, St. Louis, Missouri, November 5-8, 2006.

analysis of flexible pavements. It models the pavement as a two-dimensional axisymmetric solid of revolution and employs nonlinear stress-dependent models and failure criteria for granular materials and fine-grained soils. In this study, the goal was to establish a database of ILLI-PAVE response solutions that would eventually constitute the training and testing data sets for developing ANN-based structural models for the rapid backcalculation analyses.

A generic three-layer flexible pavement structure consisting of AC surface layer, unbound aggregate base layer, and subgrade layer was modeled in ILLI-PAVE. The top surface AC layer was characterized as a linear elastic material with Young's Modulus,  $E_{AC}$ , and Poisson ratio,  $\nu$ . The K- $\theta$  model (Hicks and Monismith 1971) was used as the non-linear characterization model for the unbound aggregate layer ( $E_R = K\theta^n$ ; where  $E_R$  is the resilient modulus,  $\theta$  is bulk stress, and  $K$  and  $n$  are regression parameters and are related through a regression equation).

Fine-grained soils were considered as "no-friction" but cohesion only materials and modeled using the commonly used bi-linear model (Thompson and Elliot 1985) for resilient modulus characterization. As indicated by Thompson and Elliot (1985), the value of the resilient modulus at the breakpoint in the bilinear curve,  $E_{Ri}$ , can be used to classify fine-grained soils as being soft, medium or stiff. The  $E_{Ri}$  is the main input for subgrade soils in ILLI-PAVE. The bilinear model parameters were set to default values. The 40-kN (9-kip) wheel load was applied as a uniform pressure of 552 kPa (80 psi) over a circular area of radius 152 mm (6 in) simulating the FWD loading.

Backpropagation type artificial neural network models (Haykin 1999) were trained in this study with the ILLI-PAVE synthetic solutions database and were used as rapid analysis tools for predicting flexible pavement layer moduli. Backpropagation type neural networks were used to develop two ANN structural models with different network architectures for predicting the pavement layer moduli ( $E_{AC}$  and  $E_{Ri}$ ) using the FWD deflection data and pavement layer thicknesses.

In this study, the 8-60-60-1 (eight inputs, two hidden layers with 60 hidden neurons each, and one output) architecture was chosen as the best architecture for the ANN models based on its lowest training and testing Mean Square Errors (MSEs) in the order of  $1 \times 10^{-4}$  (corresponding to a Root Mean Squared Error [RMSE] of 0.3%) for both output variables,  $E_{AC}$  and  $E_{Ri}$ .

Figure 1 depicts the prediction ability of the 8-60-60-1 network at the 10,000<sup>th</sup> training epoch showing very low Average Absolute Errors (AAEs). The development of ANN backcalculation models employed in this study are discussed in detail by Ceylan et al. (2005).

To fulfill the objectives of this study, the developed ANN models were applied to the field FWD data acquired at the NAPTF during full-scale traffic testing of flexible pavement sections using six-wheel and four-wheel heavy aircraft gear loading. A description of the NAPTF pavement testing program follows.

Reference to this paper should be made as follows: Gopalakrishnan, K., and Ceylan, H. 4 (2006) "Towards Real-Time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach," ANNIE 2006, ANN in Engineering Conference, St. Louis, Missouri, November 5-8, 2006.

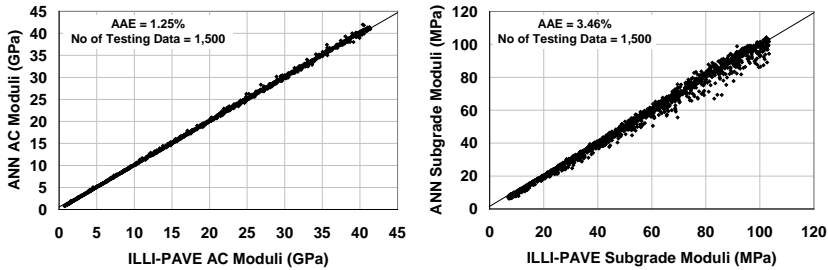


Figure 1. Performance of ANN stiffness prediction models

### NATIONAL AIRPORT PAVEMENT TEST FACILITY (NAPTF)

In this study, the following medium-strength subgrade flexible pavement test section was considered: MFC – a conventional granular base flexible pavement. The MFC section had 127-mm of P-401 AC, 200-mm of P-209 granular base (crushed stone), 307-mm of P-154 granular subbase (grey quarry blend fines) over a medium-strength subgrade (CL-CH DuPont Clay as per ASTM Unified Soil Classification System).

During CC-1 traffic testing, a six-wheel dual-tridem (B777) landing gear was loaded on the north wheel track (LANE 2) while the south side (LANE 5) was loaded with a four-wheel dual-tandem (B747) landing gear at a wheel load of 20,412 kg (45,000 lbs) (Hayhoe et al 2003; Gopalakrishnan 2004). The NAPTF test sections were trafficked until they were deemed structurally failed.

### NON-DESTRUCTIVE TESTING AT NAPTF

The FWD/HWD equipment measures pavement surface response (i.e., deflections) from an applied dynamic load that simulates a moving wheel (FAA 2004). Many studies have addressed the interpretation of FWD/HWD pavement deflection measurements as a tool to characterize pavement-subgrade systems (Bush and Baladi 1989, Tayabji and Lukanen 2000).

Nondestructive tests using both FWD and HWD were conducted on NAPTF flexible pavement test sections at various times (McQueen et al 2001). In this study, the focus is on 53.4-kN (12,000-lb) HWD test results. The deflections were measured at radial offsets of 0-mm ( $D_0$ ), 305-mm ( $D_1$ ), 610-mm ( $D_2$ ), 914-mm ( $D_3$ ), 1219-mm ( $D_4$ ), and 1524-mm ( $D_5$ ) intervals from the center of the load. The HWD tests were performed on the untrafficked C/L and on the B777 and B747 traffic lanes (LANE 2 and LANE 5).

## NAPTF PAVEMENT STIFFNESS ASSESSMENT USING ANN MODELS

The ANN backcalculation models described in this paper have been developed for backcalculating pavement layer moduli from 40-kN (9,000-lb) FWD deflection basins. Since 40-kN (9,000-lb) FWD tests were not conducted during the course of NAPTF trafficking, the 53.4-kN (12,000-lb) HWD deflection basins were normalized to 40-kN (9,000-lb) loading as the deflections were fairly linear in this range.

The variations in ANN-based backcalculated AC moduli ( $E_{AC}$ ) with the number of traffic load repetitions (N) are shown in figure 2 for MFC test section. The results are shown for the B777 and B747 traffic lanes as well as the untrafficked Centerline (C/L). Note that the changes in  $E_{AC}$  values in the untrafficked C/L were mainly due to the changes in the AC temperature. The temperature of the AC layer at the time of FWD testing has a significant influence on the surface deflections as well as the backcalculated AC modulus.

With increasing traffic load repetitions, the traffic lane  $E_{AC}$  values were distinguishably lower than the C/L values indicating loss of stiffness resulting from trafficking. Also, the B747 traffic lane  $E_{AC}$  values were consistently lower than those obtained from the B777 traffic lane indicating relative severity effects.

The variations in ANN-based backcalculated non-linear stress-dependent subgrade moduli ( $E_{Ri}$ ) with increasing number of traffic load repetitions are shown in figure 2 for MFC test section. The  $E_{Ri}$  values varied within a range of 60 – 80 MPa during the course of traffic testing. These results are consistent with the laboratory resilient modulus tests (AASHTO T292) conducted on NAPTF subgrade soil samples (Hayhoe and Garg 2001, Gopalakrishnan 2004). In figure 3, the ANN predictions are compared with results from ILLI-PAVE regression algorithms developed by Thompson (1989). The differences in the moduli predictions is attributable to the difference in methodologies (ANN versus regression).

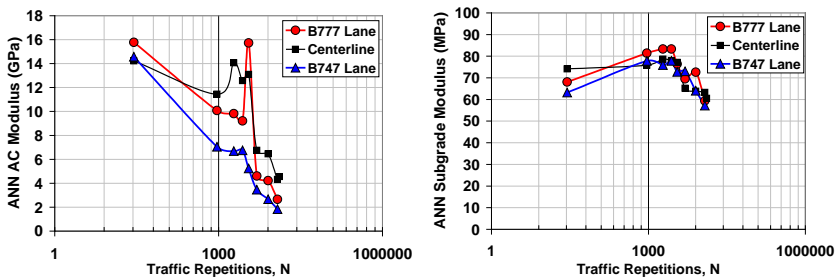
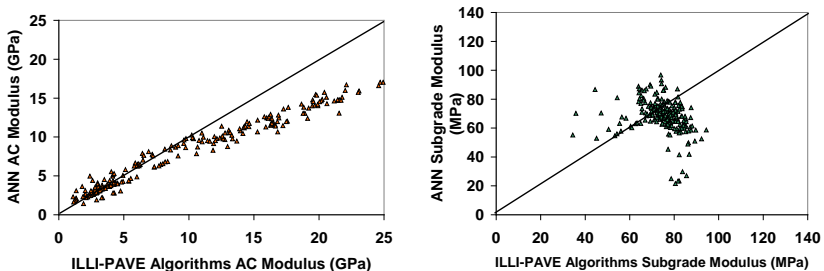


Figure 2. Variations in ANN predicted layer moduli during NAPTF traffic testing

## SUMMARY AND CONCLUSIONS

A study was undertaken to backcalculate the AC and subgrade moduli from NDT deflection data acquired at FAA's NAPTF during the full-scale traffic testing using an ANN based approach. Previous studies successfully demonstrated the ANN-based approach for backcalculating airport flexible pavement layer moduli from 160-kN (36,000-lb) HWD test data, specifically targeted towards the study of NAPTF flexible pavement sections. However, limited range of input properties were considered in developing the ANN training database.

In this study, validated ANN models trained over a comprehensive database of 28,500 datasets were employed for pavement layer moduli predictions. The ILLI-PAVE finite element synthetic solutions database, considering the non-linear, stress-dependent unbound granular layer and subgrade soil properties, were used for training the ANN. The ANN models successfully predicted the pavement layer moduli from the ILLI-PAVE finite element solutions. The best-performance ANN models were used to evaluate the NDT data acquired at the NAPTF during full-scale traffic testing with a dual-tandem Boeing 747 (B747) gear and dual-tridem Boeing 777 (B777) gear. The rapid prediction ability of the ANN based pavement stiffness prediction models makes them promising evaluation tools for analyzing NDT deflection data in real-time for both project-specific and network-level FWD testing of airport pavement systems.



**Figure 3. ANN moduli predictions compared with regression algorithm (Thompson, 1989) results**

## REFERENCES

- Ahlvin, R.G., Ulery, H.H., Hutchinson, R.L., and Rice, J.L. Multiple-Wheel Heavy Gear Load Pavement Tests. Vol. 1: Basic Report, Technical Report No. AFWL-TR-70-113, 1971, U.S. Army Engineer Waterways Experiment Station, Vicksburg, Mississippi.
- Bush, A.J. III and Baladi, G.Y., Nondestructive testing of pavements and backcalculation of moduli, 1989, ASTM Special Technical Publication (STP) 1026.
- Ceylan, H., Guclu, A., Tutumluer, E. and Thompson, M.R., Backcalculation of Full-Depth Asphalt Pavement Layer Moduli Considering Nonlinear Stress-Dependent Subgrade Behavior. The Int. J. of Pavement Engrg., 2005, 6(3), pp. 171-182.



**Reference** to this paper should be made as follows: Gopalakrishnan, K., and Ceylan, H. 7 (2006) "Towards Real-Time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach," ANNIE 2006, ANN in Engineering Conference, St. Louis, Missouri, November 5-8, 2006.

- Garg, N., Tutumluer, E. and Thompson, M.R. Structural Modeling Concepts for the Design of Airport Pavements for Heavy Aircraft. Proceedings, Fifth International Conference on the Bearing Capacity of Roads and Airfields, Trondheim, Norway, 1998.
- Garg, N. and Marsey, W. H., Comparison between Falling Weight Deflectometer and Static Deflection Measurements on Flexible Pavements at the National Airport Pavement Test Facility (NAPTF). Proceedings, 2002 Federal Aviation Administration Airport Technology Transfer Conference, Chicago, 2002.
- Gomez-Ramirez, F.M. and Thompson, M.R., Characterizing Aircraft Multiple Wheel Load Interaction for Airport Flexible Pavement Design, FAA-COE Report No. 20, Department of Civil Engineering, University of Illinois, Urbana-Champaign, 2002.
- Gopalakrishnan, K., Performance Analysis of Airport Flexible Pavement Subjected to New Generation Aircraft, Ph.D. Dissertation, 2004, University of Illinois at Urbana-Champaign, December.
- Gopalakrishnan, K., Thompson, M.R. and Manik, A., Rapid Finite-Element Based Airport Pavement Moduli Solutions Using Neural Networks. Int. J. of Computational Intelligence, 2006, 3(1), pp. 63-71.
- Hayhoe, G.H., LEAF – A New Layered Elastic Computational Program for FAA Pavement Design and Evaluation Procedures. Proceedings, 2002 Federal Aviation Administration Airport Technology Transfer Conference, Chicago, 2002.
- Hayhoe, G.F., Garg, N., and Dong, M., Permanent deformations during traffic tests on flexible pavements at the National Airport Pavement Test Facility. Proceedings of the 2003 ASCE Airfield Pavement Specialty Conference, Las Vegas, NV, 2003.
- Hayhoe, G.F. and Garg, N. Material properties database for the test pavements at the National Airport Pavement Test Facility (NAPTF). Technical Report, 2001, Airport Technology Research and Development Branch, Federal Aviation Administration, NJ.
- Haykin, S., Neural networks: A comprehensive foundation, 1999 (Prentice-Hall, Inc., NJ, USA).
- Hicks, R.G. and Monismith, C.L. Factors influencing the resilient properties of granular materials, Transportation Research Record 345, pp. 15-31, 1971 (TRB, National Research Council, Washington, DC).
- Lee, Y.-C., Kim, Y.R. and Ranjithan, S.R., Dynamic Analysis-Based Approach to Determine Flexible Pavement Layer Moduli Using Deflection Basin Parameters. Transportation Research Record 1639, 1998 (TRB, National Research Council: Washington, DC).
- McQueen, R.D., Marsey, W. and Arze, J.M. Analysis of Nondestructive Data on Flexible Pavement Acquired at the National Airport Pavement Test Facility. Proceedings, Airfield Pavement Specialty Conference, ASCE, Chicago, 2001.
- Meier, R.W. and Rix, G.J. Backcalculation of Flexible Pavement Moduli from Dynamic Deflection Basins Using Artificial Neural Networks, Transportation Research Record 1473, pp. 72-81, 1995 (TRB, National Research Council: Washington, DC).
- Raad, L. and Figueroa, J.L., Load response of transportation support systems. Transport. Eng. J. ASCE, 1980, 106(TE1), pp. 111-128.
- Rada, G. and Witczak, M.W., Comprehensive Evaluation of Laboratory Resilient Moduli Results for Granular Material, Transportation Research Record 810, 1981 (TRB, National Research Council: Washington, DC).
- Tayabji, S.D. and Lukanen, E.O., Nondestructive Testing of Pavements and Backcalculation of Moduli, 2000, ASTM Special Technical Publication (STP) 1375.
- The Asphalt Institute, Research and Development of The Asphalt Institute's Thickness Design Manual (MS-1), Ninth Edition, Research Report No. 82-2, The Asphalt Institute, College Park, Maryland, 1982.
- Thompson, M. R. (1989). "ILLI-PAVE based NDT analysis procedures." *Nondestructive testing of pavements and backcalculation of moduli*, , ASTM STP 1026, pp. 487-501.
- Thompson, M.R., ILLI-PAVE Based Conventional Flexible Pavement Design Procedure. Proceedings, Seventh International Conference on Asphalt Pavements, Nottingham, 1992.

**Reference** to this paper should be made as follows: Gopalakrishnan, K., and Ceylan, H. **8** (2006) "Towards Real-Time Structural Evaluation of In-Service Airfield Pavement Systems Using Neural Networks Approach," ANNIE 2006, ANN in Engineering Conference, St. Louis, Missouri, November 5-8, 2006.

Thompson, M.R. and Elliot, R.P., ILLI-PAVE Based Response Algorithms for Design of Conventional Flexible Pavements, Transportation Research Record 1043, pp. 50-57, 1985 (TRB, National Research Council: Washington, DC).

Thompson, M.R., Tutumluer, E. and Bejarano, M., Granular Material and Soil Moduli Review of the Literature, FAA-COE Report No. 1, Department of Civil Engineering, University of Illinois, Urbana-Champaign, 1998.