

2-2015

# Automation of DEM Cutting for Hydrologic/ Hydraulic Modeling

Brian K. Gelder

Iowa State University, [bkgelder@iastate.edu](mailto:bkgelder@iastate.edu)

Follow this and additional works at: [http://lib.dr.iastate.edu/intrans\\_techtransfer](http://lib.dr.iastate.edu/intrans_techtransfer)



Part of the [Civil Engineering Commons](#)

---

## Recommended Citation

Gelder, Brian K., "Automation of DEM Cutting for Hydrologic/Hydraulic Modeling" (2015). *Tech Transfer Summaries*. 62.  
[http://lib.dr.iastate.edu/intrans\\_techtransfer/62](http://lib.dr.iastate.edu/intrans_techtransfer/62)

This Report is brought to you for free and open access by the Institute for Transportation at Iowa State University Digital Repository. It has been accepted for inclusion in Tech Transfer Summaries by an authorized administrator of Iowa State University Digital Repository. For more information, please contact [digirep@iastate.edu](mailto:digirep@iastate.edu).

---

# Automation of DEM Cutting for Hydrologic/Hydraulic Modeling

## **Abstract**

Hydrologic analysis is a critical part of transportation design because it helps ensure that hydraulic structures are able to accommodate the flow regimes they are likely to see. This analysis is currently conducted using computer simulations of water flow patterns, and continuing developments in elevation survey techniques result in higher and higher resolution surveys. Current survey techniques now resolve many natural and anthropogenic features that were not practical to map and, thus, require new methods for dealing with depressions and flow discontinuities. A method for depressional analysis is proposed that uses the fact that most anthropogenically constructed embankments are roughly more symmetrical with greater slopes than natural depressions. An enforcement method for draining depressions is then analyzed on those depressions that should be drained. This procedure has been evaluated on a small watershed in central Iowa, Walnut Creek of the South Skunk River, HUC12 # 070801050901, and was found to accurately identify 88 of 92 drained depressions and place enforcements within two pixels, although the method often tries to drain prairie pothole depressions that are bisected by anthropogenic features.

## **Keywords**

Drainage, Flood hydrographs, Flood plains, Hydraulics, Hydrology, Watersheds, Des Moines River, Mississippi River, Missouri River, depressional analysis, digital elevation model, drainage, hydrologic analysis, hydrologic enforcement, LiDAR, watershed characterization

## **Disciplines**

Civil Engineering

February 2015

**RESEARCH PROJECT TITLE**

GIS Automation of LiDAR DEM Cutting for Hydrologic/Hydraulic Modeling

**SPONSORS**

Iowa Highway Research Board  
(IHRB Project TR-631)  
Iowa Department of Transportation  
(InTrans Project 11-397)  
Iowa State University  
Iowa Institute for Hydraulic Research, The University of Iowa  
U.S. Department of Housing and Urban Development

**PRINCIPAL INVESTIGATOR**

Brian K. Gelder  
Associate Scientist  
Agricultural and Biosystems Engineering  
Iowa State University  
515-294-3144  
bkgelder@iastate.edu

**MORE INFORMATION**

[www.intrans.iastate.edu](http://www.intrans.iastate.edu)

**InTrans  
Iowa State University  
2711 S. Loop Drive, Suite 4700  
Ames, IA 50010-8664  
515-294-8103**

The mission of the Institute for Transportation (InTrans) at Iowa State University is to develop and implement innovative methods, materials, and technologies for improving transportation efficiency, safety, reliability, and sustainability while improving the learning environment of students, faculty, and staff in transportation-related fields.

The sponsors of this research are not responsible for the accuracy of the information presented herein. The conclusions expressed in this publication are not necessarily those of the sponsors.

# Automation of DEM Cutting for Hydrologic/Hydraulic Modeling

tech transfer summary

The proposed enforcement method can provide relatively accurately enforced digital elevation models (DEMs) with relatively little effort.

## Objective

Develop a method for hydrologic enforcement using digital elevation models (DEMs) created from raw light detection and ranging (LiDAR) data that both respects natural depressions and correctly enforces flow in areas that are drained.

## Background and Problem Statement

As a critical part of transportation design, hydrologic analysis helps ensure that roads are not frequently inundated and that hydraulic structures are able to accommodate the flow regimes they will likely see. LiDAR technology is now commonly used in hydrologic analysis to create high-resolution DEMs that help model the flow of water across a landscape.

However, such technologies introduce challenges that must be solved before these data can be commonly used as a model input. High-resolution DEMs capture many high-frequency manmade features and some natural features that create hydrologic obstructions during the hydrologic enforcement process. Moreover, some landform regions have significant amounts of natural depressions that are not handled well by traditional DEM enforcement.

## Research Description

The method proposed for depressional analysis and enforcement involves three steps.

### 1. Creating a DEM from the Raw LiDAR Data

Elevation points are imported into a terrain, and unnecessary resolution is reduced. The terrain is then converted into a DEM, and elevation differences smaller than 1 centimeter are truncated. The resulting DEM is then analyzed for flow characteristics to remove depressions of one-cell extent.

### 2. Hole Punching

Depressions significant enough to warrant analysis via the enforcement algorithm are defined. This involves iteratively filling the DEM, defining regions where the DEM was filled, and calculating the maximum fill depth and total area filled of each region. The deepest point in any significant depressions is set to “null” so that water can “flow” out, and the filling process is repeated until no significant depressions remain. The depressions drained via channelized flowpaths are then removed.

### 3. Cutting

Depressions are identified that are likely created via an embankment and would drain if the embankment were removed. Depressions where the distance from the depression's deepest points to the local watershed boundary is greater than a 5 percent slope have the embankment removed and are tested for a decrease in the filled DEM elevation. The depressions that are provisionally drained are then tested for enforcement by trying to connect the deepest points in the depression to lower points outside the depression. Successful linear connections are then used to modify the DEM elevation appropriately, creating the final enforced DEM.

This procedure was evaluated at a 3 meter resolution on a small watershed in central Iowa, Walnut Creek of the South Skunk River watershed, HUC12 # 070801050901.

### Key Findings


- The procedure was found to accurately identify 88 of 92 drained depressions (about 95 percent) and then place enforcements generally accurate to within two pixels.
- Enforcements were often placed where none are necessary, with approximately four times as many enforcements as actual hydraulic structures.
- The method often tried to drain prairie pothole depressions that are bisected by anthropogenic features. Most of these enforcements reconnected a depression bisected by a road or cut across a road when the enforcement should have paralleled the road.

### Implementation Benefits


The proposed enforcement method can provide relatively accurately enforced DEMs with relatively little effort. The method does a very good job of enforcing flow where flow direction is well defined, i.e., where channelization has already occurred. It also does a good job of preserving natural and anthropogenic depressions.

### Implementation Readiness


- A different interpolation method, currently used on shallow, thin depressions in areas of channelized flow, may be used in areas with no LiDAR returns to help remove as many false depressions as possible from the start. These areas then need to be enforced with a DEM inversion process to help enforce downstream flow on rivers and major streams.
- An additional step needs to be developed that classifies all non-flowing depressions as terminal depressions, e.g., prairie potholes, lagoons, and borrow pits.
- To reduce the multiple unnecessary enforcements, a new metric should be developed that can detect areas where enforcements are appropriate, such as when flow significantly leaves the channel and when it does not move downstream to the lowest points.

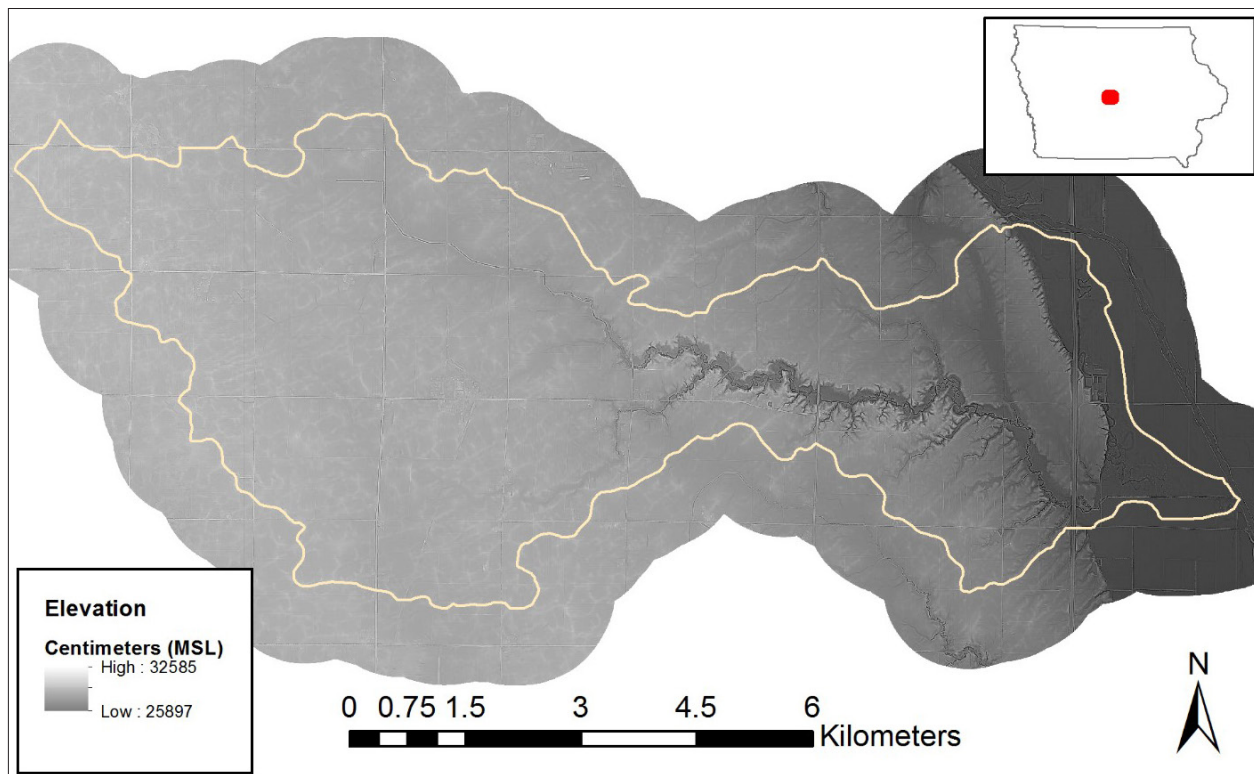

*One kilometer buffer of Walnut Creek of South Skunk River watershed*

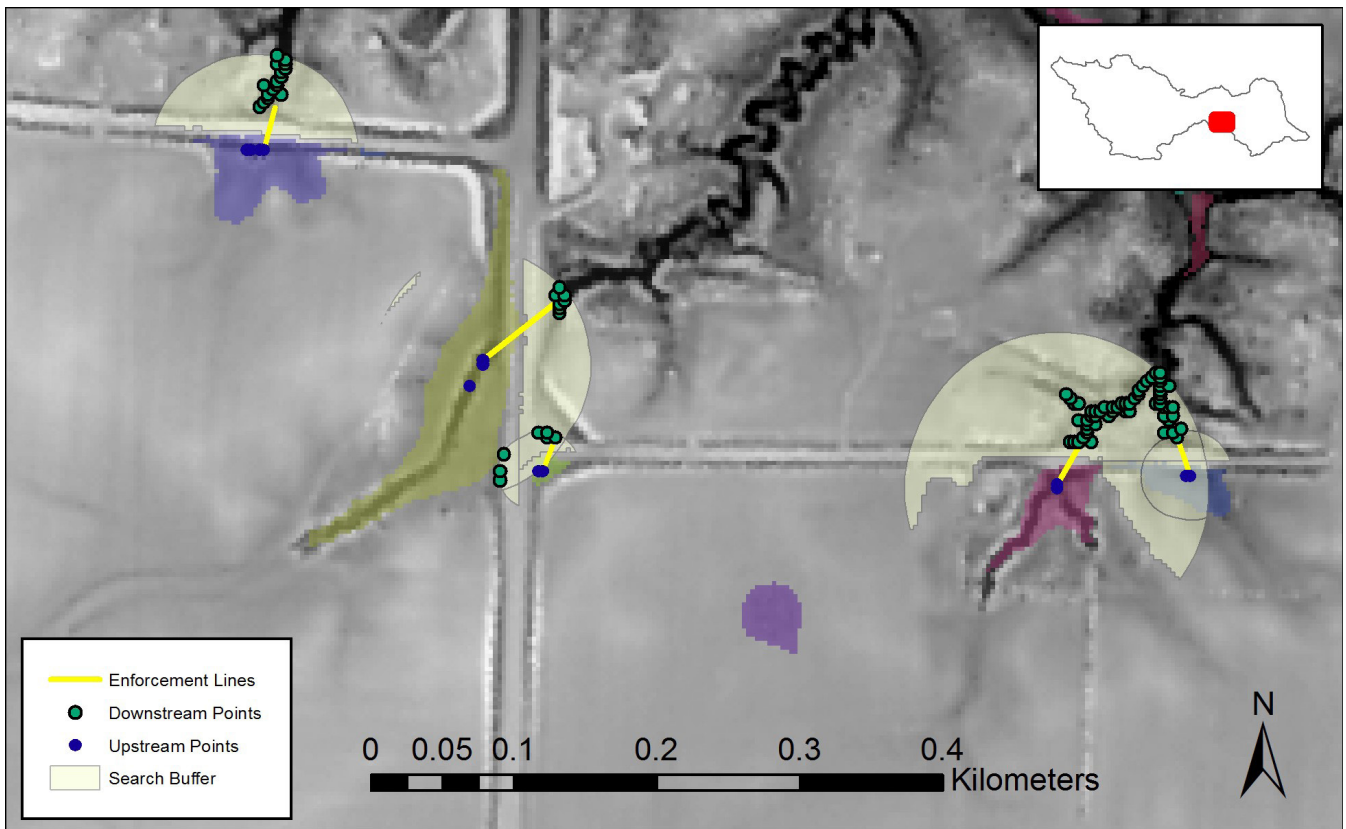

*Enforcement lines connecting upstream and downstream points*

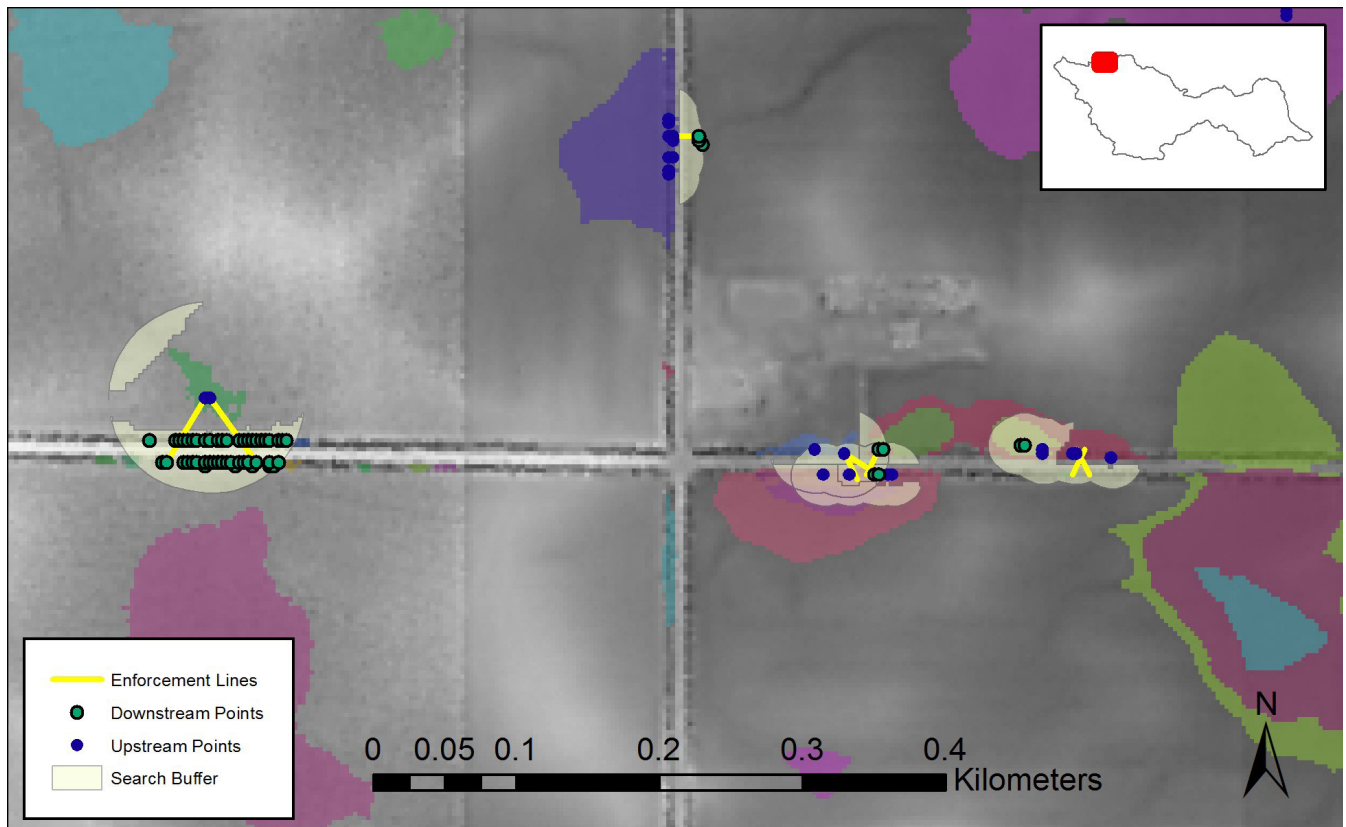

*Multiple bad enforcements and one good one (northernmost)*