

2017

Denitrification Bioreactor in Northeast Iowa

Matt Helmers

Iowa State University, mhelmers@iastate.edu

Carl Pederson

Iowa State University, carl@iastate.edu

Follow this and additional works at: <https://lib.dr.iastate.edu/farmprogressreports>

 Part of the [Agriculture Commons](#), and the [Bioresource and Agricultural Engineering Commons](#)

Recommended Citation

Helmers, Matt and Pederson, Carl (2017) "Denitrification Bioreactor in Northeast Iowa," *Farm Progress Reports*: Vol. 2016 : Iss. 1 , Article 64.

DOI: <https://doi.org/10.31274/farmprogressreports-180814-1634>

Available at: <https://lib.dr.iastate.edu/farmprogressreports/vol2016/iss1/64>

This Northeast Research and Demonstration Farm is brought to you for free and open access by the Extension and Experiment Station Publications at Iowa State University Digital Repository. It has been accepted for inclusion in Farm Progress Reports by an authorized editor of Iowa State University Digital Repository. For more information, please contact digirep@iastate.edu.

Denitrification Bioreactor in Northeast Iowa

RFR-A1696

Matt Helmers, professor
Carl Pederson, ag specialist
Department of Agricultural
and Biosystems Engineering

Introduction

Denitrification bioreactors for removal of nitrate in tile drainage are a new water quality technology that has rapidly gained interest in Iowa. A bioreactor is composed of an excavated trench filled with woodchips colonized by denitrifying bacteria. As drainage waters containing nitrate flow by these “good” bacteria, they convert the nitrate in the water to nitrogen gas. A critical component in evaluating the performance of these treatment systems is the documentation of nitrate-N reduction over a range of weather and flow conditions.

Materials and Methods

A denitrification bioreactor was installed at the Northeast Research and Demonstration Farm, Nashua, Iowa, April 2009. A unique feature of this bioreactor was that it was constructed with a trapezoidal cross-section, the first to do so in the state. The bioreactor’s dimensions were 120 ft long x 3 ft deep x 15 ft (top width) to 8 ft (bottom width).

Hardwood chips from a local supplier were used as fill material. Water samples were taken from the control structures by farm staff approximately twice weekly during flow conditions from 2012 through 2016. The

samples were analyzed for nitrate-nitrogen at the Iowa State University Agricultural and Biosystems Engineering Water Quality Laboratory.

Results and Discussion

The bioreactor consistently reduces nitrate concentration of effluent water (Figure 1). Although flow is not shown, the periods where influent and effluent concentrations are similar are during high flow conditions where there would be low retention time in the bioreactor. Conversely, periods when concentrations of the effluent water are near zero are during very low flow conditions.

Box plots of influent and effluent nitrate-N concentrations are shown in Figure 2. From this information, the mean influent concentration was 15.9 mg/L while the mean effluent concentration was 9.4 mg/L. The median concentration was 15.8 and 10.84 mg/L for the influent and effluent, respectively. Overall, there was a 41 percent reduction in mean nitrate-N concentration and 32 percent in median nitrate-N concentration of the water that went through the bioreactor. We are continuing to work on summarizing drainage flow information to calculate an overall load reduction due to the bioreactor.

Acknowledgements

The work of the Northeast Iowa Research Farm for the continued collection of these bioreactor water samples is gratefully acknowledged.

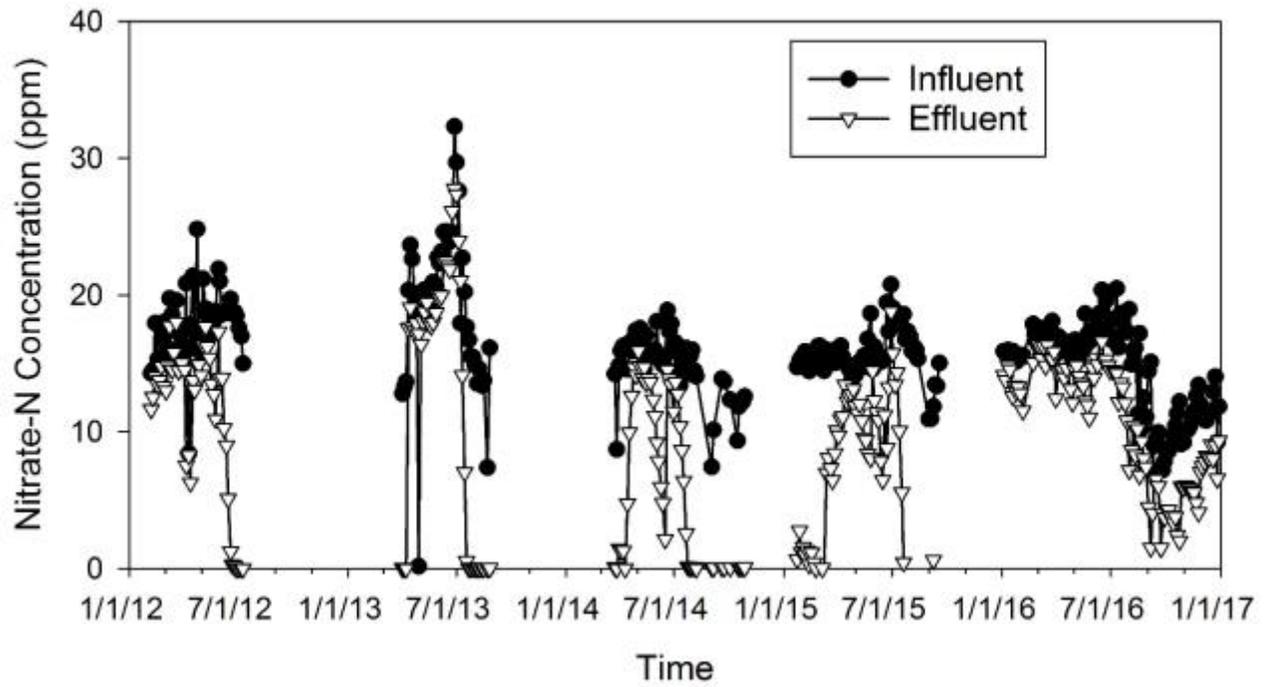


Figure 1. Nitrate-N concentrations in the bioreactor influent and effluent.

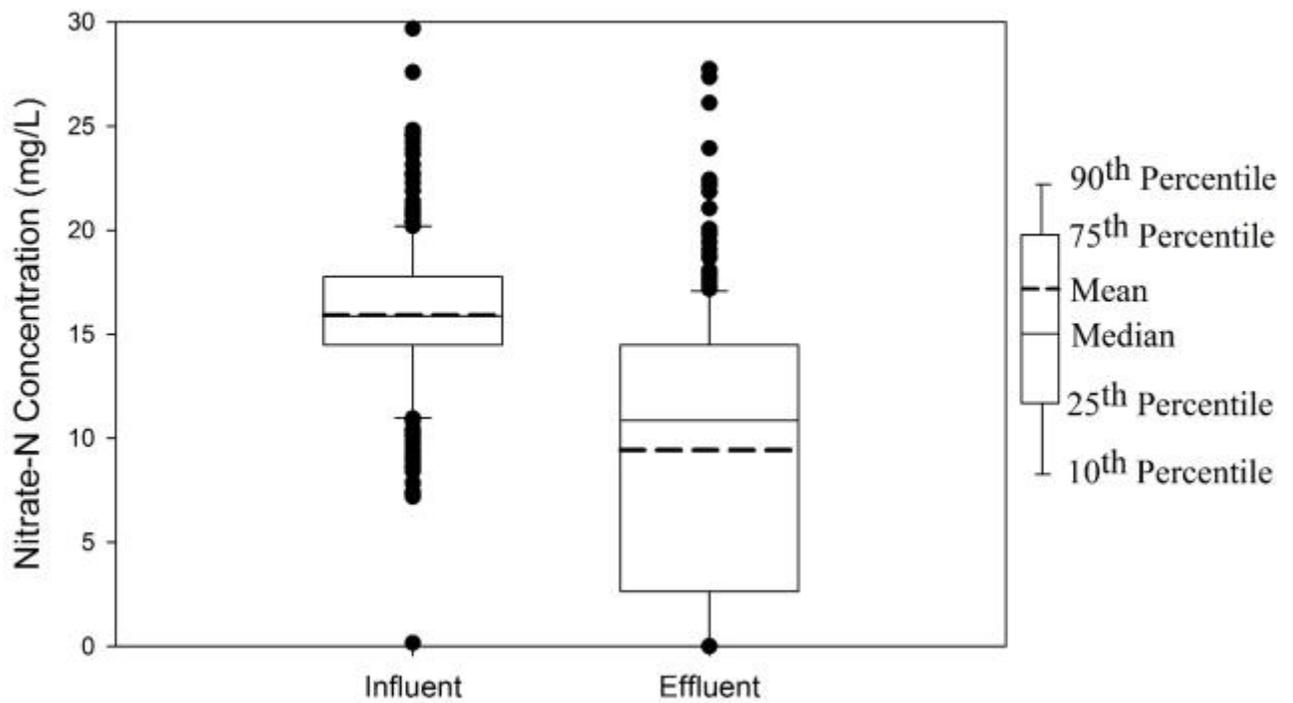


Figure 1. Box plot of nitrate-N concentrations in the influent and effluent from the bioreactor for 2012-2016.